



黑爵AKP846带屏机械键盘

MECHANICAL KEYBOARD


使用说明书
User Manual

目录 KATALOG

中文 1-9
English 10-18

一、基本参数

产品品牌: AJAZZ
产品型号: 黑爵AKP846
传输方式: USB有线
接口类型: 键线分离式Type-C接口
产品尺寸: 371x219x21mm
产品重量: ≈950g
外壳材质: ABS注塑
产品结构: Gasket结构
灯光效果: 无光
按键布局: 84键, 带金属音量旋钮
矩阵: 全键无冲
屏幕尺寸: 240x60mm
分辨率: 1920x440px
支持系统: Windows 7/10/11, 2015年以后的Mac系统

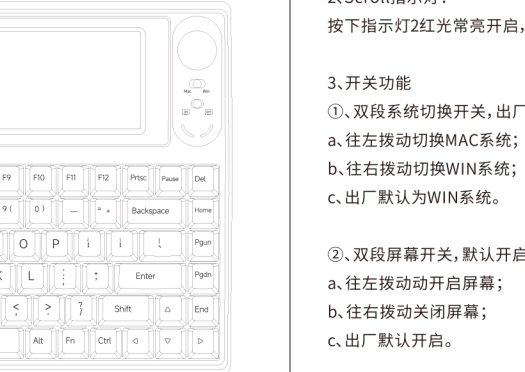

-1-

二、指示灯说明


1. Capslock开关指示:
按下指示灯1红光常亮开启大写, 再按红光熄灭恢复小写。

2. Scroll指示灯:
按下指示灯2红光常亮开启, 再按红光熄灭恢复默认。

3. 开关功能
①. 双段系统切换开关, 出厂默认win系统:
a. 往左推动切换MAC系统;
b. 往右推动切换WIN系统;
c. 出厂默认为WIN系统。

②. 双段屏幕开关, 默认开启:
a. 往左推动开启屏幕;
b. 往右推动关闭屏幕;
c. 出厂默认开启。

4. 旋钮功能
左旋: 音量减
右旋: 音量加
按下: 静音, 再按解除静音

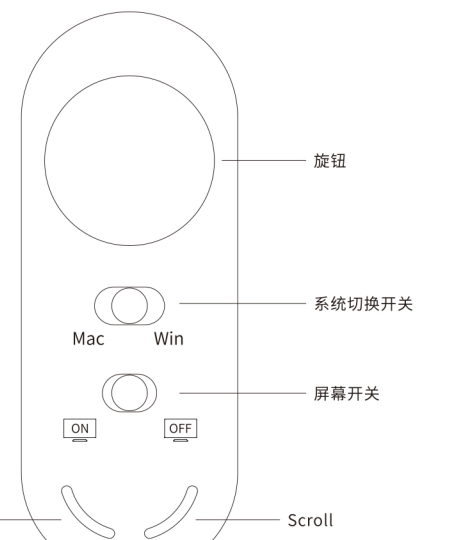


-2-

三、多媒体组合键说明

组合键	WIN系统	Mac系统(单按F区)	组合键	WIN系统	Mac系统
FN+F1	媒体播放器	亮度+	FN+F7	播放/暂停	上一曲
FN+F2	音量减小	亮度+	FN+F8	下一曲	播放/暂停
FN+F3	音量增加	任务控制	FN+F9	邮件	下一曲
FN+F4	静音	控制台	FN+F10	浏览器	静音
FN+F5	播放器停止播放		FN+F11	我的电脑	音量-
FN+F6	上一曲		FN+F12	计算器	音量+
FN+HOME	INS		FN+DEL	Scroll	
FN+WIN		按下Win, 再按解锁。(带记忆功能, 无灯指示)			


四、屏幕使用说明

1. 初次使用时: 请保证有网络链接。(鼠标右键点击桌面, 点击显示设置进入设置页面)

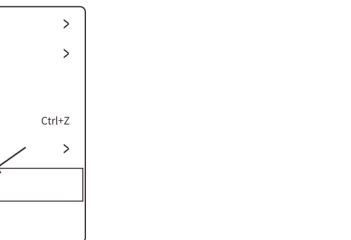


-3-

2. 进入设置后: 点击选择扩展这些显示器

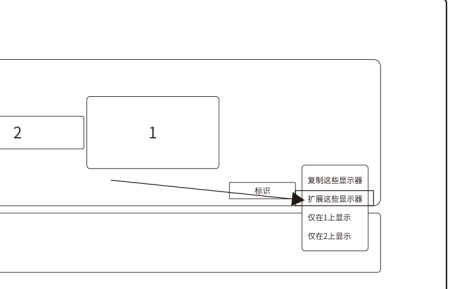

3. 调整方向: 可把副屏2设置在主屏上面或者下面、侧面, 设置后点击应用, 鼠标就可以从对应的位置拖入副屏。

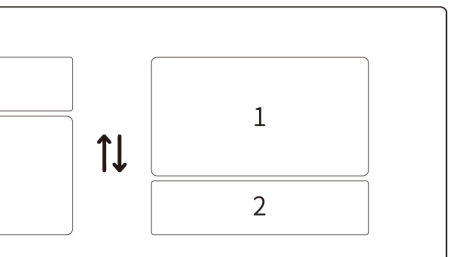


-4-

4. 设置后鼠标可以通过对应方向进入副屏使用。




设置壁纸操作:

1. 首先, 打开Windows设置 (Win+I), 左侧边栏, 点击[个性化]

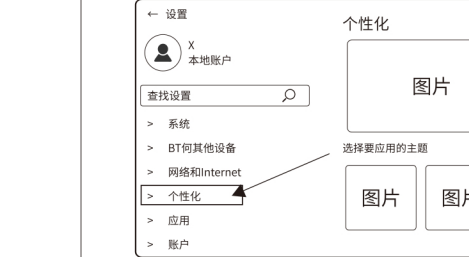


-5-

2. 个性化下, 再点击[背景(背景图像、颜色、幻灯片)]

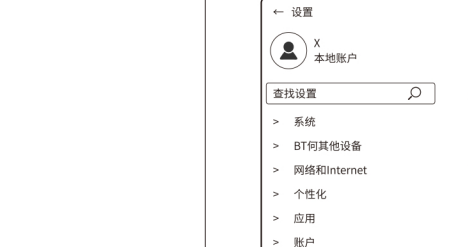


3. 当前路径个性化>背景, 先选择[照片], 将需要的图片都添加进[最近使用的图像]

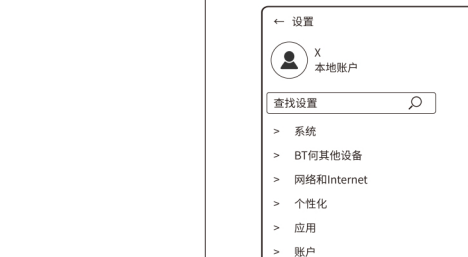


-6-

4. 最后, 在最近使用的图像, 点击[右键], 然后选择想要设置的图像, 即可分别为每个显示器设置壁纸

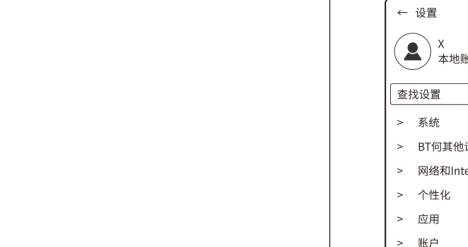

五、触控设置说明

1. 确保外部显示器处于扩展模式(要选择扩展模式, 请同时按Windows键+P)

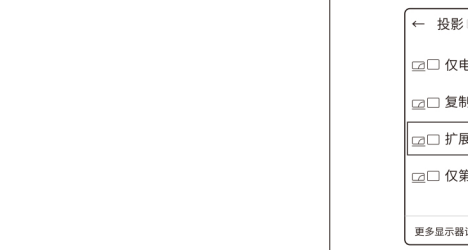

-7-

2. 在桌面模式下, 单击开始菜单 (Windows键), 选择设置, 然后选择控制面板




3. 选择查看方式: 大图标, 选择平板电脑设置, 然后选择设置




-8-

4. 两个屏幕具有白色背景, 主显示器将显示文本(触摸此屏幕将其标识为触摸屏) 如果不是平板电脑屏幕, 则按Enter键以移到下一个屏幕。要关闭该工具, 请按Esc。

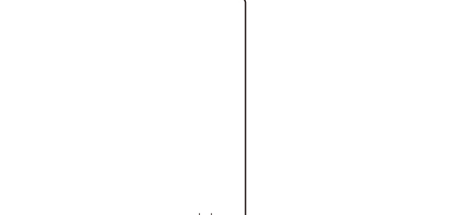

5. 您将看到白色屏幕, 它具有以下说明(按Enter键继续执行下一步骤, 以完成配置)

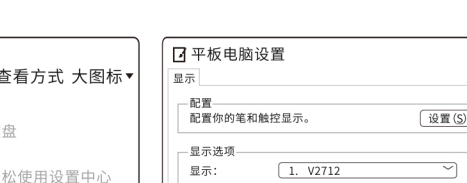

6. 按Enter键以便第一次触摸与第一个显示器同步


7. 如上便可完成操作

-10-

Thank you very much for purchasing our AJAZZ AKP846. This product has a screen function. I hope it can bring you a new operating experience. For more operations, you can go to the AJAZZ official website to download the driver.

1. Product Specifications

Product brand: AJAZZ
Product model: AKP846
Transmission method: USB wired
Interface type: Separate Type-C interface
Product size: 371x219x21mm
Product weight: About 950g
Shell material: ABS injection molding
Product structure: Gasket structure
Lighting effect: No light
Key layout: 84 keys, with metal volume knob
No conflict: All keys
Screen size: 240x60mm
Resolution: 1920x440px
Supported systems: Windows 7/10/11, Mac systems after 2015

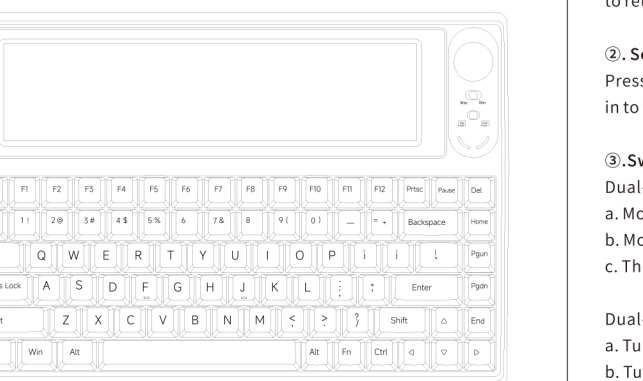

-10-


2. Indicator Light Description

①. Caps lock switch indicator light:
Press the indicator light 1 to turn on the red light to turn on uppercase, and then press the indicator light to turn off the red light to return to lowercase.

②. Scroll indicator light:
Press the indicator light 2 to turn on the red light, then press it again to turn off the red light and restore to default.

③. Switch function
Dual-stage system switch, factory default win system:
a. Move to the left to switch the MAC system;
b. Move to the right to switch to the WIN system;
c. The factory default is WIN system.

④. Knob function
Left rotation: volume-
Right rotation: volume+
Press: Press to mute, press again to unmute

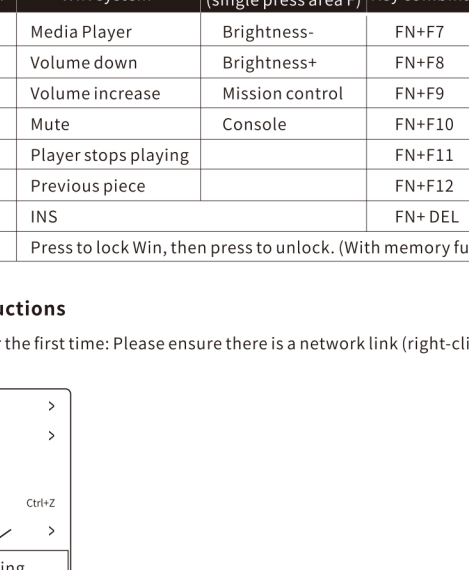

-11-

3. Multimedia key combination instructions

Key combination	WIN system	Mac system (single press area F)	Key combination	WIN system	Mac system (single press area F)
FN+F1	Media Player	Brightness-	FN+F7	Play / Pause	Previous piece
FN+F2	Volume down	Brightness+	FN+F8	Next track	Play / Pause
FN+F3	Volume increase	Mission control	FN+F9	Mail	Next track
FN+F4	Mute	Console	FN+F10	Browser	Mute
FN+F5	Player stops playing		FN+F11	My computer	Volume-
FN+F6	Previous piece		FN+F12	Calculator	Volume+
FN+HOME	INS		FN+DEL	Scroll	
FN+WIN		Press to lock Win, then press to unlock. (With memory function, no light indication)			

4. Screen instructions

4.1. When using for the first time: Please ensure there is a network link (right-click the desktop and click Display Settings to enter the settings page)




4.2. After entering settings: Click to select to expand these displays



4.3. Adjust the direction: You can set the secondary screen 2 above, below, or on the side of the main screen. After setting, click Apply, and the mouse can be dragged into the secondary screen from the corresponding position.


-12-

4.4. After setting, the mouse can be used in the secondary screen through the corresponding direction.

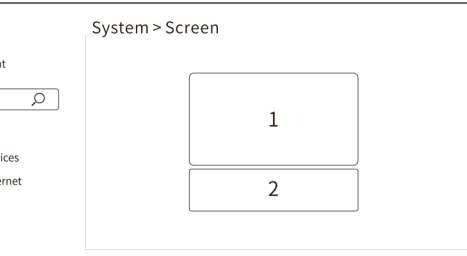


Set Wallpaper Operation:

① First, open Windows Settings (Win+I), left sidebar, click [Personalization]

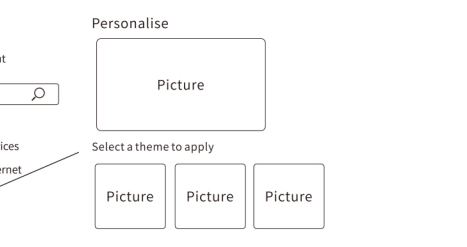


-13-

② Under Personalization, click [Background [Background Image, Color, Slideshow]]

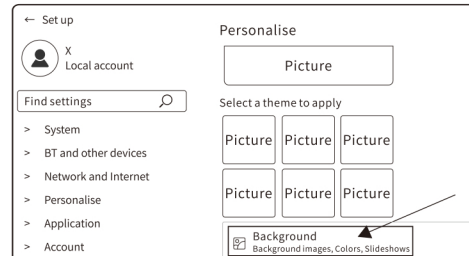

③ Current path Personalization>Background, first select [Photos] and add all the required pictures to [Recently used images]

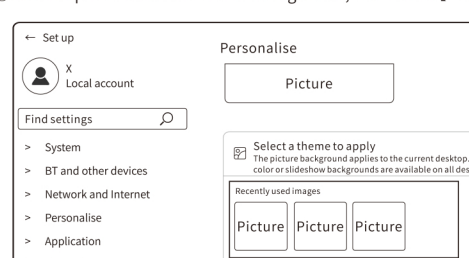


-15-

5.1. Make sure the external monitor is in extended mode (to select extended mode, press Windows Key + P simultaneously)




5.2. In desktop mode, click the Start menu (Windows key), select Settings, then Control Panel

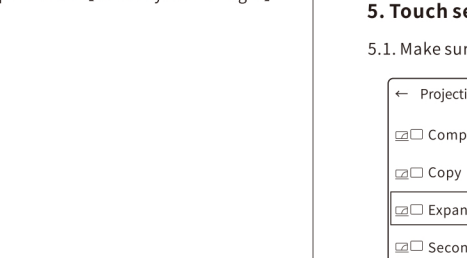


-16-

5.3. Select View as: Large icons, select Tablet settings, and then select Settings

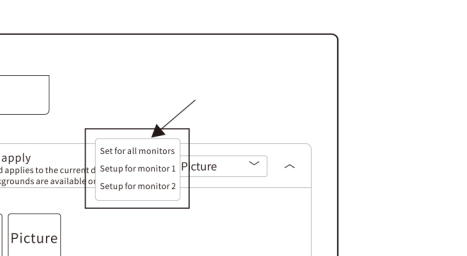


5.4. Both screens have a white background and the main monitor will display text (touch this screen to identify it as a touch screen and press Enter to move to the next screen if this is not a tablet screen). To close the tool, press Esc.

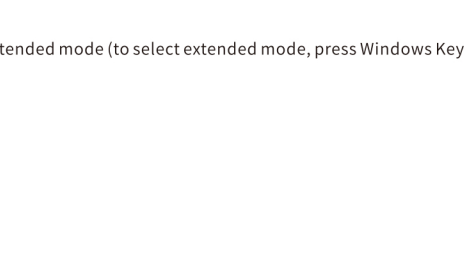


-17-

5.5. You will see a white screen with the following instructions (press Enter to continue to the next step to complete the configuration)

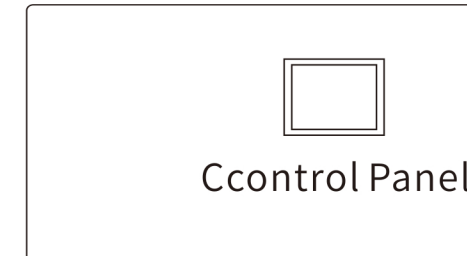

5.6. Press Enter to synchronize first touch with first monitor

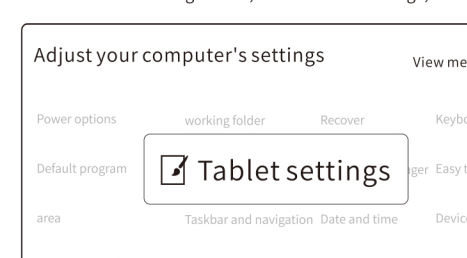

5.7. The operation can be completed as above

-18-

产品质保 (Product Warranty)

感谢您对黑爵产品的信任与支持, 为了让您放心使用本产品, 更好地保障您的权益, 我公司将严格遵守并执行相关规定, 实行售后服务。
1. 服务有效期: 自购买之日起质量保证12个月
2. 服务内容: 按微型计算机商品维修更换退货责任规定进行服务
3. 不属于服务范围:
a. 已经提出有效服务或免费维修的;
b. 未按正确方式使用、维护、保管导致故障或损坏的;
c. 非本司授权维修机构维修导致的故障或损坏;
d. 质保卡上无经销资料及盖章之产品;
e. 擅自涂改三包凭证内容的;
f. 由于不可抗力 (如自然灾害等) 原因造成产品之不良;
g. 人为因素导致产品不良 (如操作失误、碰撞、输入不合适电压等);
h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。

质保卡 (Warranty Card)

产品型号: _____
购买日期: _____
客户姓名: _____
联系电话: _____
联系地址: _____

• 本凭证为黑爵产品售后服务的重要依据, 请您妥善保管。
• 任何产品问题, 可添加微信公众号咨询小编。

合格证

了解更多产品信息请关注
微信公众号: 请搜索 "AJAZZ黑爵外设"
抖音号: 请搜索 "ajazz2009"

了解更多产品信息请关注
微信公众号: 请搜索 "AJAZZ黑爵外设"
抖音号: 请搜索 "ajazz2009"

制造商: 深圳市黑爵同创电子科技有限公司
地址: 深圳市光明区凤凰街道东坑社区科能路中集智园大厦A座21楼
电话: 86-0755-2740 7340
执行标准: GB/T 14081-2010